


Underlay System for Ceramic Tile & Natural Stone

CERAZORB

CeraZorb® Benefits:

- ◆ "Synthetic cork product" will not rot, support mold and mildew, or absorb moisture like real natural cork
- ◆ Sound reducing underlayment for ceramic tile and natural stone floor systems
- ◆ Acoustical performance equal to 1/2" cork at half the cost of 1/2" cork
- ◆ Thin profile only 3/16" thick, available in 4' x 100' rolls
- ◆ Economical system is easy and fast to install, reducing installation time and labor costs
- ◆ Passes TCA to light commercial rating

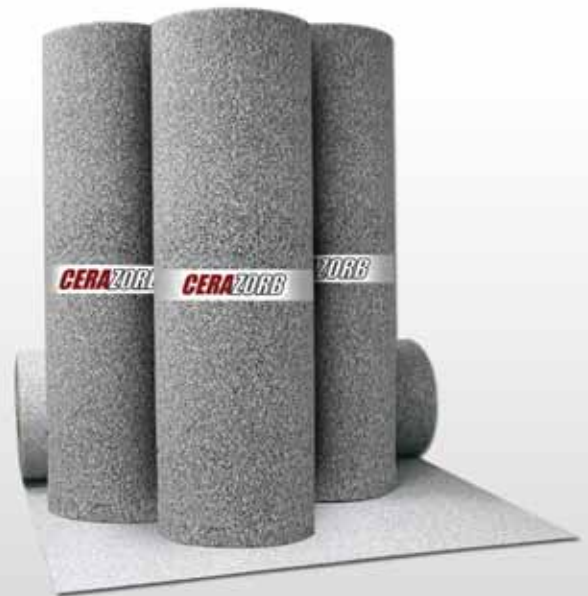


ACOUSTIC PERFORMANCE


Building Construction	IIC	FIIC
Wood Structure	IIC 53	
Concrete (6" slab) (no ceiling)	ΔIIC 22	FIIC59

Visit www.soundseal.com for field and lab tests.

Note: Results may vary depending upon building and floor configurations.
Test procedure methods per standards set forth by ASTM E492-90, ASTM E-989-89,
ASTM E-1007-97, and ASTM E2179-03.

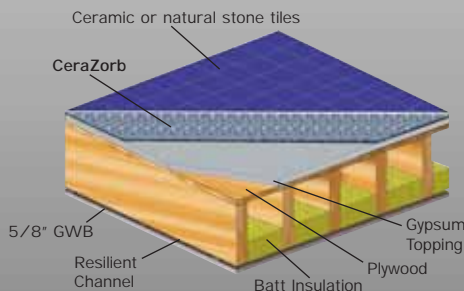

Typical Wood Construction

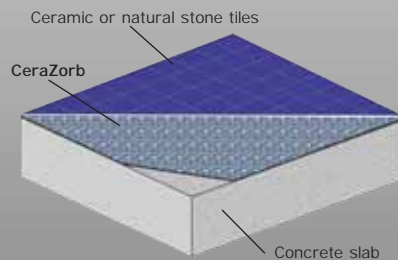

Typical Concrete Slab Construction

Product Specifications

- ◆ .1875" or 5mm thick
- ◆ 4' x 100' rolls
- ◆ 400 sq. ft. per roll
- ◆ 40 lbs. per roll

Accessories

- ◆ Perimeter isolation*

WARRANTY

Impacta™ Underlayments will remain responsible for the performance/consistent quality as long as they have installed according to the written instructions supplied by Sound Seal and in situations where the specific Impacta model is meant to be installed. Sound Seal warranties that spillage of casual water onto a finished floor with CeraZorb installed will have no effect on the performance of the CeraZorb. Any liability for sub-sequential damage is not accepted. The sound reducing capabilities of Impacta underlayments have been tested under laboratories conditions and therefore may differ in other situations.

* required

IMPACTA
IMPACT INSULATION SYSTEMS

50 H.P. Almgren Drive ◆ Agawam, MA 01001
Tel. 800.569.1294 ◆ Fax 413.789.4444
www.impactaunderlayment.com ◆ impacta@soundseal.com

SOUND SEAL