

Two Layer Underlay System for Linoleum, Vinyl, or VCT



Jumpax® Benefits:

- ◆ Sound reducing impact insulation system for glue-down vinyl, linoleum and VCT floors
- ◆ Free-floating, two layer underlay product
- ◆ Simple to install, reducing project labor overhead
- ◆ Easily accepts replacement vinyl or VCT finished floor with new tenants
- ◆ Engineered with built-in self leveling characteristics which create a smooth finished floor
- ◆ Design promotes increased thermal insulation
- ◆ Moisture and mold resistant




ACOUSTIC PERFORMANCE


Building Construction	IIC	FIIC
Wood Structure	IIC 54	FIIC 57
Concrete (6" slab) (no ceiling)	IIC 51	

Visit www.soundseal.com for field and lab tests.

Note: Results may vary depending upon building and floor configurations. Test procedure methods per standards set forth by ASTM E492-90, ASTM E-989-89, ASTM E-1007-97, and ASTM E2179-03.

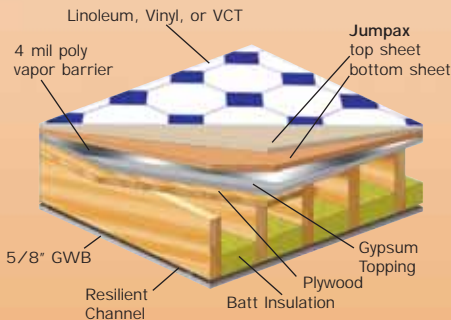

Typical Wood Construction

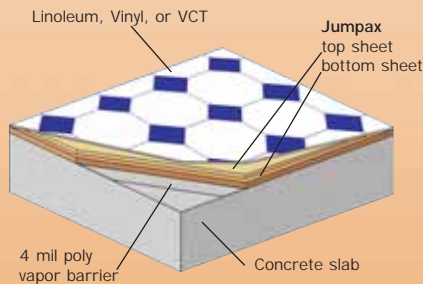

Typical Concrete Slab Construction

Product Specifications

- ◆ 3/8" or 10mm thick
- ◆ 23" x 47" board size
- ◆ 4 top and bottom boards
- ◆ 31 sq. ft. per pack
- ◆ 42 lbs. per pack
- ◆ 1,488 sq. ft. per skid
- ◆ 48 packs per skid
- ◆ 2,100 lbs. per skid
- ◆ MDF, polystyrene foam with aluminum film

Accessories

- ◆ 4 mil poly vapor barrier *
- ◆ Perimeter isolation *
- ◆ Poly tape *
- ◆ Acoustical caulk •

* required

• optional

WARRANTY

Impacta™ Underlayments will remain responsible for the performance/consistent quality as long as they have installed according to the written instructions supplied by Sound Seal and in situations where the specific Impacta model is meant to be installed. Sound Seal warranties that spillage of casual water onto a finished floor with Jumpax installed will have no effect on the performance of the Jumpax. Any liability for sub-sequential damage is not accepted. The sound reducing capabilities of Impacta underlayments have been tested under laboratories conditions and therefore may differ in other situations.



50 H.P. Almgren Drive ◆ Agawam, MA 01001
Tel. 800.569.1294 ◆ Fax 413.789.4444
www.impactaunderlayment.com ◆ impacta@soundseal.com

