

Acoustical Underlay System for Laminate & Engineered Wood

PROZORB

ProZorb® Benefits:

- Thin profile - only 3/32" thick
- Adds warmth and comfort to floor, reduces airborne reflected sound
- Economical floating system is easy and fast to install, reducing installation time and labor costs
- Mold and mildew resistant, will not rot, shrink, or absorb water, works as a vapor barrier
- Available in 41" x 58.5' rolls
- 200 sq. ft. per roll, only 5lbs. per roll




ACOUSTIC PERFORMANCE


Building Construction	IIC	FIIC
Wood Structure	IIC 52	Check our website for updated test data
Concrete (6" slab)	ΔIIC 22	Check our website for updated test data

Visit www.soundseal.com for field and lab tests.

Note: Results may vary depending upon building and floor configurations.
Test procedure methods per standards set forth by ASTM E492-90, ATSM E-989-89, ATSM E-1007-97, and ATSM E2179-03.

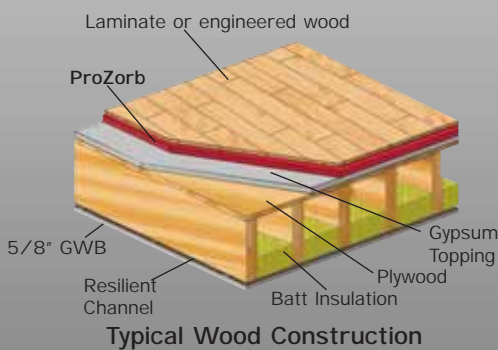

Typical Wood Construction

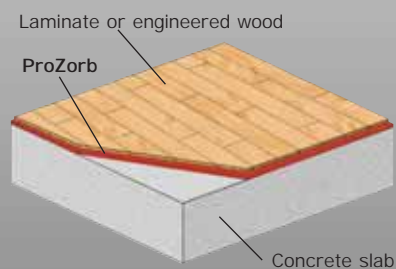

Typical Concrete Slab Construction

Product Specifications

Thickness: 3/32"
Roll Size: 41" x 58.5' rolls
200 sq. ft. per roll
5 lbs. per roll

Accessories

Required Accessories:

Perimeter isolation

(or leave a 3/8" gap around perimeter)

WARRANTY

Impacta™ Underlayments will remain responsible for the performance/consistent quality as long as they have been installed according to the written instructions supplied by Sound Seal and in situations where the specific Impacta model is meant to be installed. Sound Seal warranties that spillage of casual water onto a finished floor with ProZorb installed will have no effect on the performance of the ProZorb. Any liability for sub-sequential damage is not accepted. The sound reducing capabilities of Impacta underlayments have been tested under laboratory conditions and therefore may differ in other situations.



50 H.P. Almgren Drive • Agawam, MA 01001
Tel. 800.569.1294 • Fax 413.789.4444
www.impactaunderlayment.com • impacta@soundseal.com

