


Underlay System for Laminate & Engineered Wood



REDUPAX
SOUND REDUCING UNDERFLOOR

Redupax® Benefits:

- ◆ Made from 100% natural wood fiber, allows for leveling of floor imperfections up to 1/8" per 3ft.
- ◆ Free-floating, economical system saves installation time
- ◆ Rigid, stable top surface simulates feel of nail-down hardwood flooring, guarantees longer lifetime of floor
- ◆ Benefit of increased thermal insulation for warmth and comfort
- ◆ High smoothing qualities create a beautiful finished floor
- ◆ Provided with a special VVP paper protective covering for easy installation, moisture and mold resistant
- ◆ Redupax is the only laminate floor underlayment of its kind in the marketplace today


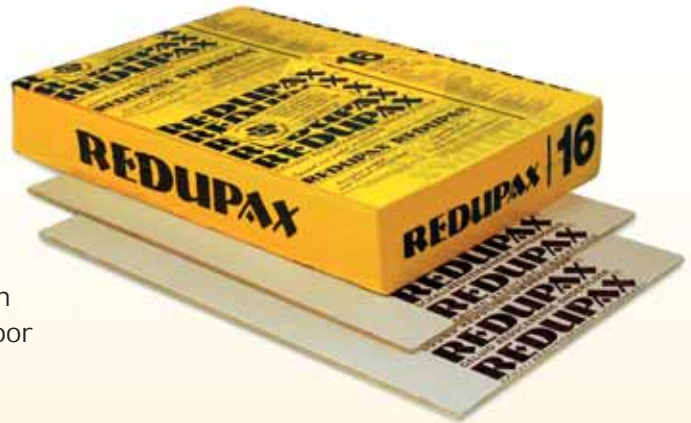


ACOUSTIC PERFORMANCE

Building Construction	IIC	FIIC
Wood Structure	IIC 55	FIIC 54
Concrete (6" slab) (no ceiling)	IIC 52	FIIC 57

Visit www.soundseal.com for field and lab tests.

Note: Results may vary depending upon building and floor configurations.
Test procedure methods per standards set forth by ASTM E492-90, ASTM E-989-89, ASTM E-1007-97, and ASTM E2179-03.

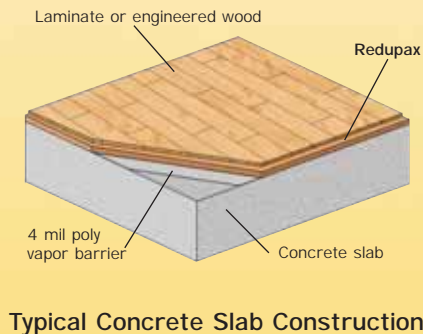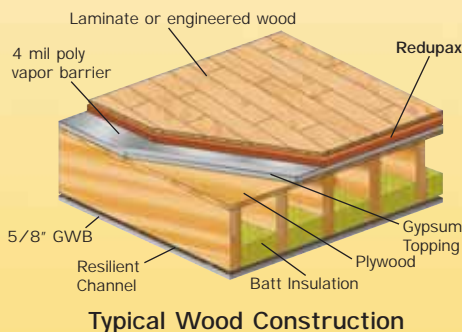

Product Specifications

- ◆ 3/8" or 9mm thick
- ◆ 23 1/4" x 33 7/8" board size
- ◆ 16 boards per pack
- ◆ 87.4 sq. ft. per pack
- ◆ 50 lbs. per pack
- ◆ 28 packs per skid
- ◆ 2,447 sq. ft. per skid
- ◆ 1,500 lbs. per skid

WARRANTY

Impacta™ Underlayments will remain responsible for the performance/consistent quality as long as they have installed according to the written instructions supplied by Sound Seal and in situations where the specific Impacta model is meant to be installed. Sound Seal warranties that spillage of casual water onto a finished floor with Redupax installed will have no effect on the performance of the Redupax. Any liability for sub-sequential damage is not accepted. The sound reducing capabilities of Impacta underlayments have been tested under laboratories conditions and therefore may differ in other situations.

Accessories

- ◆ 4 mil poly vapor barrier *
 - ◆ Perimeter isolation *
 - ◆ Poly tape *
 - ◆ Acoustical caulk •
- * required • optional



50 H.P. Almgren Drive ◆ Agawam, MA 01001
Tel. 800.569.1294 ◆ Fax 413.789.4444
www.impactaunderlayment.com ◆ impacta@soundseal.com

