

Underlay System for Nail-Down Hardwood Floors



SoundEater® Benefits:

- ◆ Sound reducing underlayment for 'nail-down' solid and semi-solid wood floor systems
- ◆ Engineered to reduce BOTH impact sound and airborne sound
- ◆ Floating system with built-in leveling properties that can eliminate costly substrate preparation
- ◆ Tongue and groove format with built-in nailing strip makes installation easy
- ◆ Natural cushioning increases lifetime of finished floor product
- ◆ All natural product with the added benefit of increased thermal insulation




ACOUSTIC PERFORMANCE


Building Construction	IIC	FIIC
Wood Structure	IIC 56	Pending
Concrete (6" slab)	ΔIIC 25	FIIC 61

Visit www.soundseal.com for field and lab tests.

Note: Results may vary depending upon building and floor configurations. Test procedure methods per standards set forth by ASTM E2179-03 and ISO 717-2.

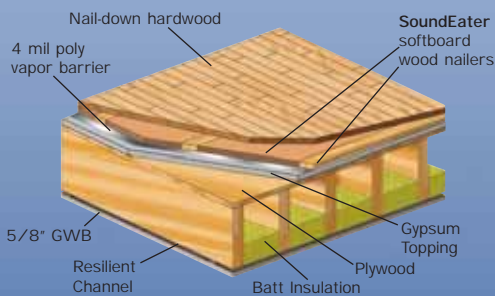

Typical Wood Construction

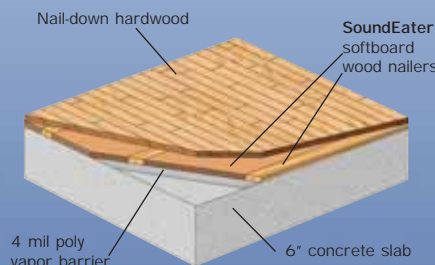

Typical Concrete Slab Construction

Product Specifications

- ◆ 1 1/16" or 27mm thick
- ◆ 36" x 10" softboards
- ◆ 1 3/4" x 82 3/4" profiles
- ◆ 2 1/2 boards :1 pack
- ◆ 17.4 sq. ft. per pack
- ◆ 418 sq. ft. per skid
- ◆ 24 packs per skid
- ◆ 705 lbs. per skid
- ◆ 100% natural wood product made from recycled material
- ◆ Tongue and groove natural wood softboard with profiled wooden strip

Accessories

- ◆ 4 mil poly vapor Barrier

WARRANTY

Impacta™ Underlayments will remain responsible for the performance/consistent quality as long as they have installed according to the written instructions supplied by Sound Seal and in situations where the specific Impacta model is meant to be installed. Any liability for sub-sequential damage is not accepted. The sound reducing capabilities of Impacta underlayments have been tested under laboratories conditions and therefore may differ in other situations.



50 H.P. Almgren Drive ◆ Agawam, MA 01001
Tel. 800.569.1294 ◆ Fax 413.789.4444
www.impactaunderlayment.com ◆ impacta@soundseal.com

